



Anemometer Indicator

PL-390K



■ Dimensions

Unit : mm

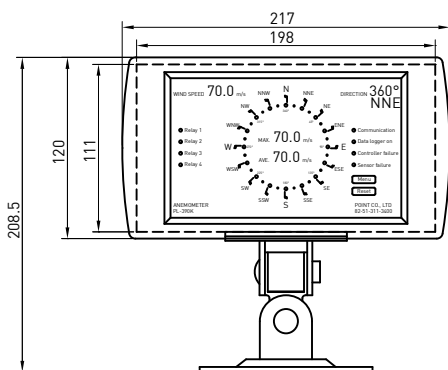

FEATURES

- Wind Speed & Direction Display
- Wind Vector Display & Alarm
- TFT Color LCD Module
- Low Noise
- MAX, INS, AVE Speed Display
- Touch Screen

SPECIFICATIONS

Power Supply	AC 100 ~ 240V 50/60Hz
Input Signal	RS232C Interface, RS422 Interface, 4 ~ 20mA
Power Supply to Sensor	DC 12V 1.3A
Display	TFT Color LCD Module
Scale Range	Wind Speed : 0 ~ 99.9m/s Direction : 0 ~ 360°
Operating temperature Range	-10℃ ~ +50℃
Relative Humidity	85% RH MAX (Non-Condensing)
Relay Output (Set enable)	Low 1b dry contact (10A 125V~) Middle 1b dry contact (10A 125V~) High 1b dry contact (10A 125V~)
Analog Output Signal	4 ~ 20mA
Digital Output Signal	RS232C Interface, RS422 Interface

POINT
Anemometer Indicator