
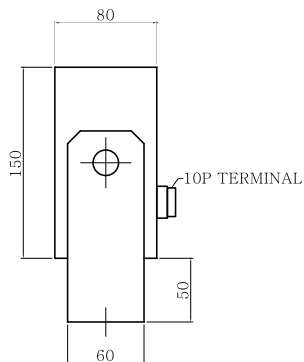
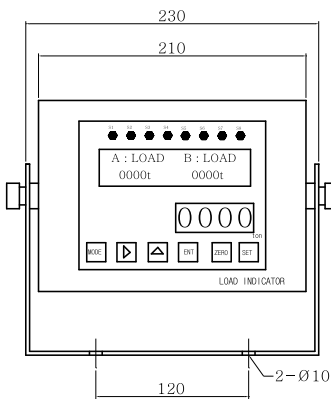


# Local Display

## PL-80 SERIES

Local Display



### FEATURES

SIMPLE DISPLY

### APPLICATIONS

ALL TYPE CRANES

### SPECIFICATIONS

<b>POWER SUPPLY</b>	AC110V / 220V ±10% 50/60HZ	
<b>POWER CONSUMPTION</b>	APPROX 10W	
<b>INPUT SIGNAL</b>	SERIAL RS422 FROM LOAD CELL CONTROLLER or LOAD LIMITER	
<b>DISPLAY</b>	<b>A,B,C,D LOAD</b>	<b>TOTAL LOAD</b>
	LCD MODULE	7 SEGMENT 4 DIGITS RED L.E.D.
<b>WORKING TEMPERATURE RANGE</b>	-10°C ~ +50°C	
<b>RELATIVE HUMIDITY</b>	85% RH MAX (NON-CONDENSING)	
<b>DECIMAL POINT POSITION</b>	0, 0.0, 0.00, 0.000	
<b>MIN. DIVISION</b>	x1, x2, x5, x10	
<b>MAX. DISPLAY</b>	9999	