


Anemometer Transmitter



WS-403

Anemometer Transmitter

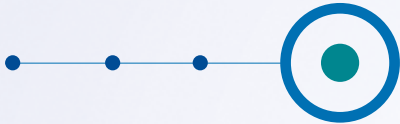

014 + 015

POINT
Anemometer Sensor

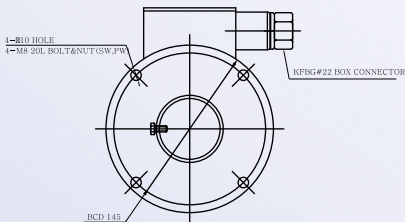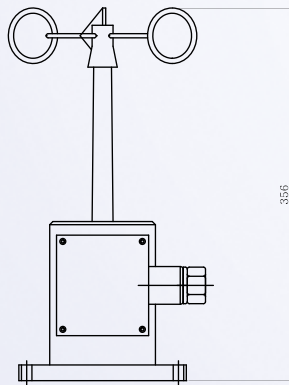

FEATURES

- PROPELLER CUP TYPE
- HIGH PERFORMANCE WIND MEASUREMENT DEVICE
- ACCURATE WIND SPEED
- CONICAL ANEMOMETER CUPS PROVIDE EXCELLENT LINEARITY

APPLICATIONS

- OVER HEAD CRANE
- TURN OVER CRANE
- GOLIATH CRANE
- RMQC, RMGC

SPECIFICATIONS

MEASURING TYPE	PROPELLER +	
POWER SUPPLY	DC 12 - 18V	
MEASURING RANGE		
WIND SPEED	0 - 70 m/s	
STARTING THRESHOLD	0.5 m/s	
ACCURACY	WIND SPEED	0 - 10 m/s : ± 0.5%
	WIND SPEED	35 - 60 m/s : ± 1%
DIRECTION ACCURACY	± 3°	
OPERATING TEMPERATURE RANGE	-35°C - +60°C	
HOUSING PROTECTION CLASS	IP65	
OUTPUT SIGNAL	RS422	

OPTION

- BIRD SPIKE
- HEATING FUNCTION